

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Drain Master[™] Rotary Drain

DSS-8000 Series

- DSS-8000-X Capped Overflow, 12" Handle
- DSS-8000-SPI Capped Overflow, 5" Handle
- DSS-8000-SP2 Capped Overflow, 18" Handle
- DSS-8015 With Overflow Assembly
- DSS-8015-P With Overflow Assembly, Prison Package

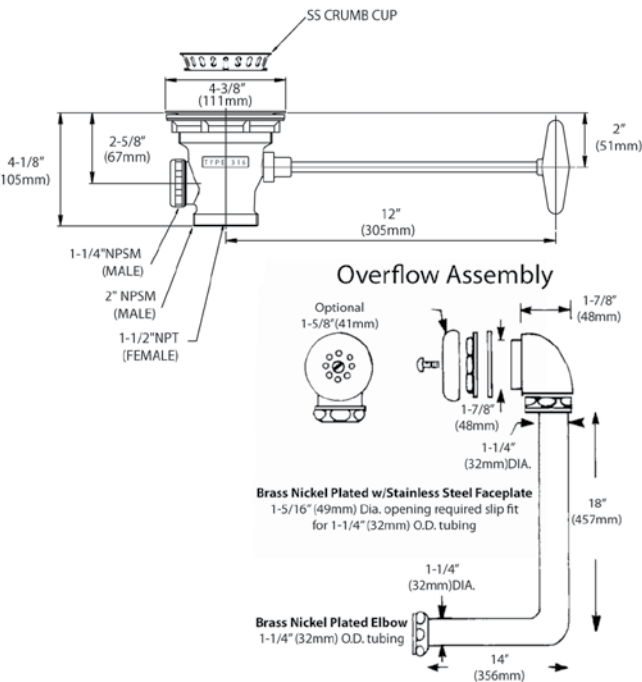

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" or 2" NPS Male waste outlet
Flow Rate: Max 40gpm

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Type 316 stainless steel drain body
- Self-centering stainless steel face flange
- Stainless steel rotary handle
- 3 times the flow rate of conventional lever drains
- Services from the top; no disassembly required

SPECIFICATIONS:

Drain Master Rotary Drain to be Encore DSS-8000 Series in the following configuration:

- ___ DSS-8000-X Capped Overflow Outlet, 12" Handle
- ___ DSS-8000-SP1 Capped Overflow Outlet, 5" Handle
- ___ DSS-8000-SP2 Capped Overflow Outlet, 18" Handle
- ___ DSS-8015 With Overflow Assembly
- ___ DSS-8015-P With Overflow Assembly, Prison Package

Drain to have Type 316 stainless steel construction. Drain to be for 3-1/2" sink opening diameter. Drain to have self-centering stainless steel face flange with stainless steel beehive crumb cup strainer. The stainless steel rotary handle in the open position drain shall allow for fast drainage and shall have positive sealing action when closed. Drain to accept 1-1/4" OD overflow elbow tube. To be universal style for use with both 2" male NPSM or 1-1/2" NPT female outlet.

US Patent 6,145,136

AVAILABLE OPTIONS:

- DSS-Y003 Replacement Crumb Cup
- DSS-Y007 Flat Strainer
- DSS-Y006 Strainer Retainer Kit



COMPLIES WITH:
ANSI A112.18.1/B125