

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Commercial Single Hole Deck Mount Pre-Rinse Assembly with Add-On Faucet

KC50-1x00-AFx Series

KC50-1000-AF1	6" Add-On, Compression Valves
KC50-1000-AF2	8" Add-On, Compression Valves
KC50-1000-AF3	10" Add-On, Compression Valves
KC50-1000-AF4	12" Add-On, Compression Valves
KC50-1000-AF5	14" Add-On, Compression Valves
KC50-1000-AF6	16" Add-On, Compression Valves
KC50-1000-AF7	18" Add-On*, Compression Valves

*Double jointed add-on faucet



Approximate shipping weight - 13 lb
 Warranty - 3 years parts

Heavy duty pre-rinse assembly designed to withstand the demands of commercial operations.

Low-Flow Spray Valve

- 1.6gpm flat spray standard
- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

SPECIFICATIONS:

Commercial single Hole Deck Mount Pre-Rinse Assembly to be Encore KC50-1000 Series in the following configuration:

_____	KC50-1000-AF1	6" Add-On, Compression Valves
_____	KC50-1000-AF2	8" Add-On, Compression Valves
_____	KC50-1000-AF3	10" Add-On, Compression Valves
_____	KC50-1000-AF4	12" Add-On, Compression Valves
_____	KC50-1000-AF5	14" Add-On, Compression Valves
_____	KC50-1000-AF6	16" Add-On, Compression Valves
_____	KC50-1000-AF7	18" Add-On*, Compression Valves

*Double jointed add-on faucet

Pre-rinse hose to be constructed of Santoprene[®]. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray head to be furnished with 1.6gpm* Water Saver Spray. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand.

*All flow rates are @ 60psi

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" –
 2011 – US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G




KC50-1x00-AFx Series

Commercial Single Hole Deck Mount Pre-Rinse Assembly with Add-On Faucet

PREMIUM PLUMBING PRODUCTS
Encore[®]

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

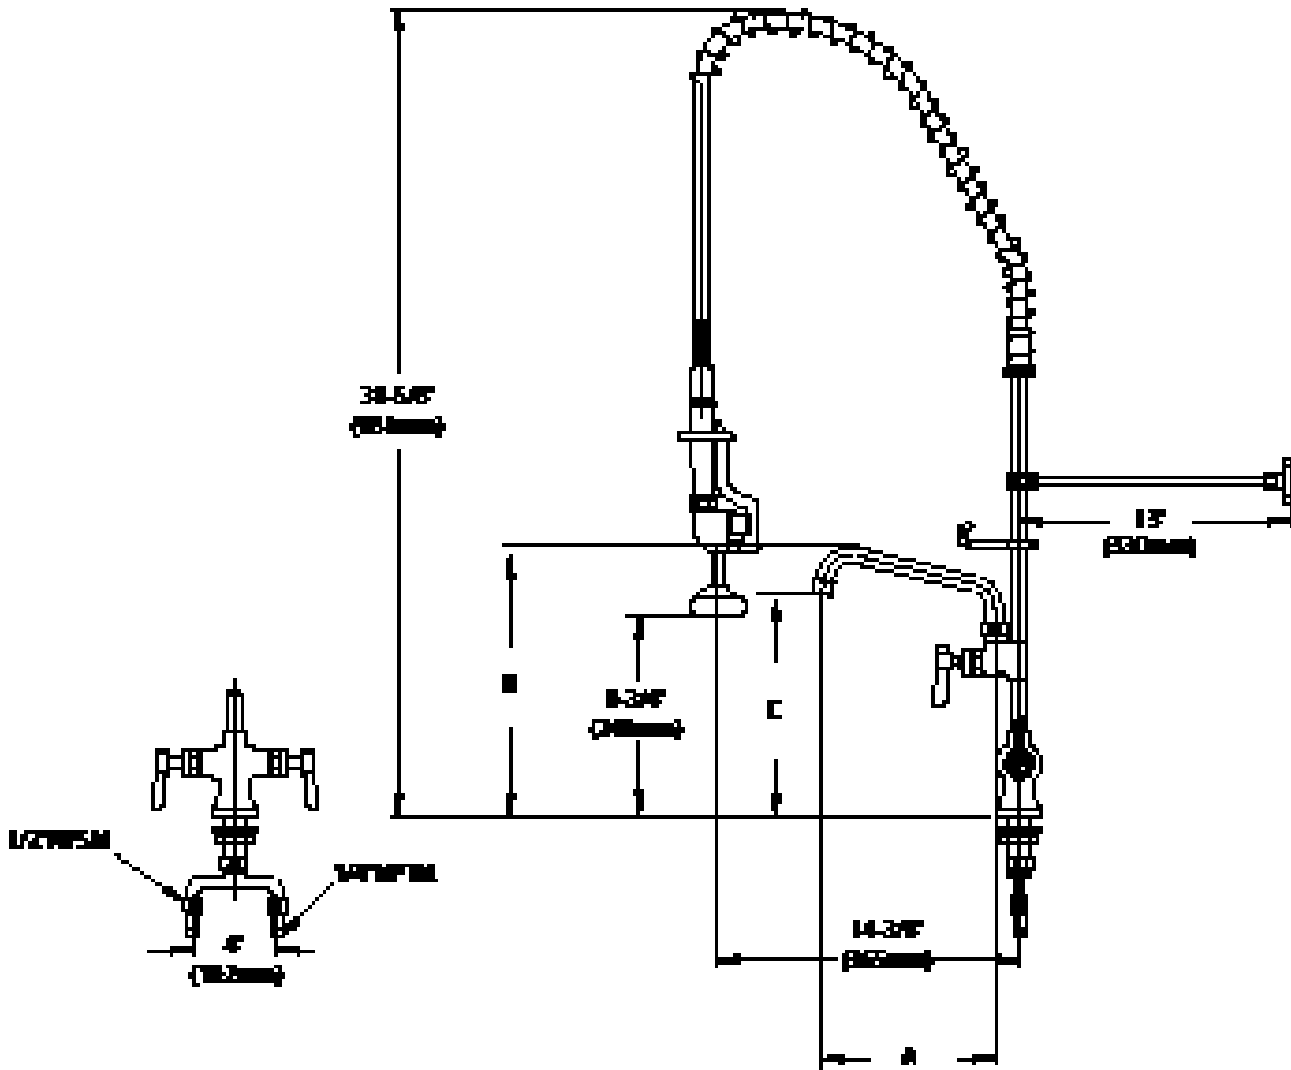

Model No.	A	B	C
KC50-1000-AF1	6" (152mm)	12-5/16" (313mm)	9-3/4" (248mm)
KC50-1000-AF2	8" (203mm)	12-3/4" (324mm)	10-1/4" (260mm)
KC50-1000-AF3	10" (254mm)	13-3/16" (335mm)	10-3/4" (273mm)
KC50-1000-AF4	12" (305mm)	13-5/8" (347mm)	11-1/4" (286mm)
KC50-1000-AF5	14" (356mm)	14-1/16" (358mm)	11-3/4" (298mm)
KC50-1000-AF6	16" (406mm)	14-1/2" (369mm)	12-1/4" (311mm)
KC50-1000-AF7	18" (457mm)	15" (380mm)	12-3/4" (324mm)

1-1/2" (29mm) hole for deck is recommended to accommodate 1/2" supply nipples.

1/2" NPT Female Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Dimensions shown in inches (mm) are for reference only and are subject to change.