

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Wall Mount Service Sink Faucet  
**KC77-5147-VY1**



1/2" NPSM Female Inlets  
 Inlets adjustable from 4" (102mm) to 8" (203mm)  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi  
 Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts


Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Polished chrome plated cast brass body
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow

**SPECIFICATIONS:**

Wall Mount Service Sink Faucet to be Encore KC77-5147-VY1. Faucet body to be constructed of polished chrome plated brass with ADA compliant lever handles. Atmospheric vacuum breaker heavy duty 7" cast spout with pail hook and standard 3/4" garden hose threaded outlet. Valves to be 1/4 - turn full volume compression type with integral check valves to prevent cross-flow and back-flow. Supply inlets to be 8" (203mm) on center, offset 2-1/2", adjustable from 3-3/8" to 8-3/8". 15" wall brace standard.

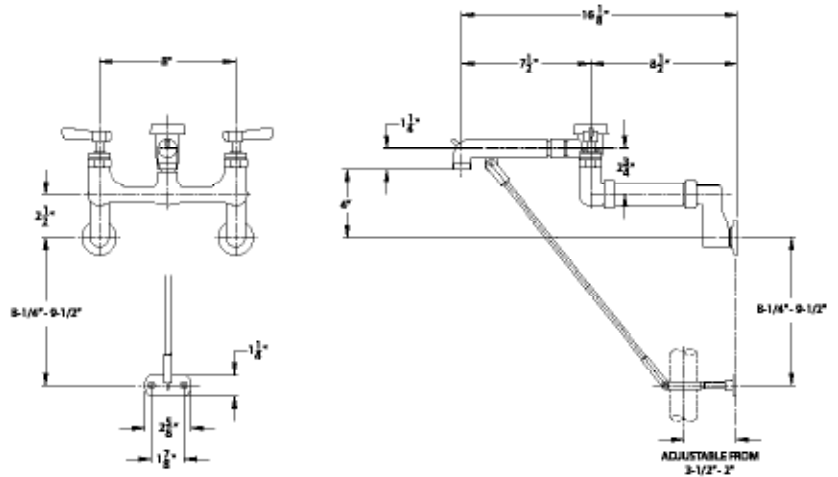

*Dimensions shown in inches (mm) are for reference only and are subject to change.*

