

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Wall Mount Pot Sink Faucet with
 Straight Swing Spout and Cross Handles

KL34-801x Series

- KL34-8010 10" Straight swing spout
- KL34-8012 12" Straight swing spout
- KL34-8014 14" Straight swing spout
- KL34-8018 18" Straight swing spout

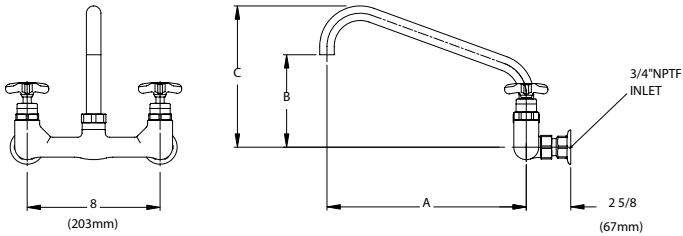

Dimensions shown in inches (mm) are for reference only
 and are subject to change.

3/4" NPT Female Inlets
 Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 20 - 125psi

Approximate shipping weight - 9 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

Commercial Quality Features

- Straight swing spout design
- Cross handle design
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- 1" diameter spout offers unrestricted water flow for quick filling of pots and kettles

SPECIFICATIONS:

Wall Mount Kettle Faucet to be Encore KL34 Series
 in the following configuration:

- _____ KL34-8010 10" Straight Swing Spout
- _____ KL34-8012 12" Straight Swing Spout
- _____ KL34-8014 14" Straight Swing Spout
- _____ KL34-8018 18" Straight Swing Spout

Faucet body to be constructed of polished chrome plated brass. Faucet to have 8" adjustable inlet centers. Handles to be cross. Color coded temperature indexes shall meet international standards. Valves to be full turn with integral check valve to prevent cross-flow and back-flow. Spout to be straight swing style with leak proof double O-ring seal design and full flow Quik-Fil™ 1" dia. opening for flow rate of 54gpm @ 60psi.

Model No.	A	B	C
KL34-8010	10" (254mm)	4-7/8" (124mm)	7-3/4" (197mm)
KL34-8012	12" (305mm)	5-5/8" (143mm)	8-1/2" (216mm)
KL34-8014	14" (355mm)	6-1/4" (158mm)	9-1/4" (235mm)
KL34-8018	18" (457mm)	7-7/8" (200mm)	10-7/8" (276mm)

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

