

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Low Lead 4" (102mm) Deck Mount
 Faucet with Swing Spout, and 4" Wrist Blade
 Handles

KL41-4xxx-SE4 Series

- KL41-4106-SE4 6" Spout, Ceramic Valves
- KL41-4006-SE4 6" Spout, Compression Valves
- KL41-4108-SE4 8" Spout, Ceramic Valves
- KL41-4008-SE4 8" Spout, Compression Valves
- KL41-4110-SE4 10" Spout, Ceramic Valves
- KL41-4010-SE4 10" Spout, Compression Valves
- KL41-4112-SE4 12" Spout, Ceramic Valves
- KL41-4012-SE4 12" Spout, Compression Valves

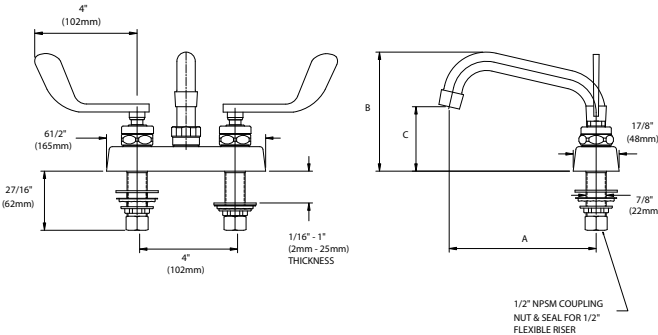

Dimensions shown in inches (mm) are for reference only
 and are subject to change.

1/2" NPS Male Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Note: 1-1/8" (29mm) holes for deck are recommended
 to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial
 quality for hand sinks.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Low Lead Deck Mount Faucet to be Encore KL41 Series
 in the following configuration:

- _____ KL41-4006-SE4 6" Spout, Compression Valves
- _____ KL41-4106-SE4 6" Spout, Ceramic Valves
- _____ KL41-4008-SE4 8" Spout, Compression Valves
- _____ KL41-4108-SE4 8" Spout, Ceramic Valves
- _____ KL41-4010-SE4 10" Spout, Compression Valves
- _____ KL41-4110-SE4 10" Spout, Ceramic Valves
- _____ KL41-4012-SE4 12" Spout, Compression Valves
- _____ KL41-4112-SE4 12" Spout, Ceramic Valves

Faucet body to be constructed of polished chrome plated brass. Handles
 to be 4" wrist blade. Supply inlets to be 4" on center. Valves to be 1/4-turn
 with integral check valve to prevent cross-flow and back-flow. Spout to be
 stainless steel tubular swing style with leak proof double O-ring seal design.
 Color coded temperature indexes shall meet international standards. 2.2gpm
 aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-4006-SE4	6" (152 mm)	4-3/8" (111mm)	2-5/8" (66mm)
KL41-4106-SE4	6" (152 mm)	4-3/8" (111mm)	2-5/8" (66mm)
KL41-4008-SE4	8" (203mm)	5-5/16" (135mm)	3-1/16" (78mm)
KL41-4108-SE4	8" (203mm)	5-5/16" (135mm)	3-1/16" (78mm)
KL41-4010-SE4	10" (254mm)	5-13/16" (148mm)	3-9/16" (90mm)
KL41-4110-SE4	10" (254mm)	5-13/16" (148mm)	3-9/16" (90mm)
KL41-4012-SE4	12" (304mm)	6-1/4" (159mm)	4" (102mm)
KL41-4112-SE4	12" (304mm)	6-1/4" (159mm)	4" (102mm)

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE



Faucet Configuration for KL41-4000 Series

