

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] 8" (203mm) Deck Mount Faucet with Tubular Swing Spout and Lever Handles

KL41-8xxx-SE1 Series

- KL41-8106-SE1 6" spout, ceramic valves
- KL41-8006-SE1 6" spout, compression valves
- KL41-8108-SE1 8" spout, ceramic valves
- KL41-8008-SE1 8" spout, compression valves
- KL41-8110-SE1 10" spout, ceramic valves
- KL41-8010-SE1 10" spout, compression valves
- KL41-8112-SE1 12" spout, ceramic valves
- KL41-8012-SE1 12" spout, compression valves
- KL41-8114-SE1 14" spout, ceramic valves
- KL41-8014-SE1 14" spout, compression valves

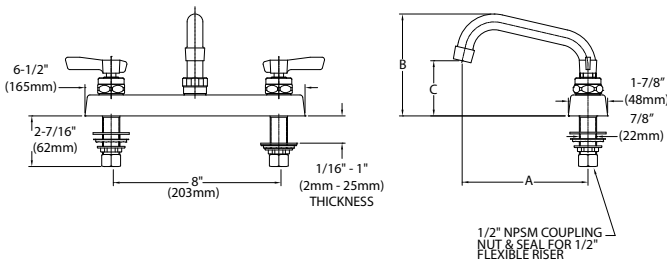

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi
1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality for hand sinks.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Deck Mount Faucet to be Encore KL41 Series in the following configuration:

- _____ KL41-8106-SE1 6" spout, ceramic valves
- _____ KL41-8006-SE1 6" spout, compression valves
- _____ KL41-8108-SE1 8" spout, ceramic valves
- _____ KL41-8008-SE1 8" spout, compression valves
- _____ KL41-8110-SE1 10" spout, ceramic valves
- _____ KL41-8010-SE1 10" spout, compression valves
- _____ KL41-8112-SE1 12" spout, ceramic valves
- _____ KL41-8012-SE1 12" spout, compression valves
- _____ KL41-8114-SE1 14" spout, ceramic valves
- _____ KL41-8014-SE1 14" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with lever handles. Supply inlets to be 8" on center. Compression valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-8106-SE1	6" (152mm)	4-3/8" (111mm)	2-5/8" (66mm)
KL41-8006-SE1	6" (152mm)	4-3/8" (111mm)	2-5/8" (66mm)
KL41-8108-SE1	8" (203mm)	5-5/16" (135mm)	3-1/16" (78mm)
KL41-8008-SE1	8" (203mm)	5-5/16" (135mm)	3-1/16" (78mm)
KL41-8110-SE1	10" (254mm)	5-13/16" (148mm)	3-9/16" (90mm)
KL41-8010-SE1	10" (254mm)	5-13/16" (148mm)	3-9/16" (90mm)
KL41-8112-SE1	12" (304mm)	6-1/4" (159mm)	4" (101mm)
KL41-8012-SE1	12" (304mm)	6-1/4" (159mm)	4" (101mm)
KL41-8114-SE1	14" (356mm)	6-3/4" (171mm)	4-1/2" (114mm)
KL41-8014-SE1	14" (356mm)	6-3/4" (171mm)	4-1/2" (114mm)

For a complete list of available options for KL41-8000 Series, see product configurator on reverse.



NSF - 61/9-372 - U.P. Code
ASME A112.18.1/CSA B125.1

