

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> 4" (102mm) Wall Mount Faucet with Tubular Swing Spout and 4" Wrist Blade Handles

## KL45-4xxx-SE4 Series

- KL45-4106-SE4 6" spout, ceramic valves
- KL45-4006-SE4 6" spout, compression valves
- KL45-4108-SE4 8" spout, ceramic valves
- KL45-4008-SE4 8" spout, compression valves
- KL45-4110-SE4 10" spout, ceramic valves
- KL45-4010-SE4 10" spout, compression valves
- KL45-4112-SE4 12" spout, ceramic valves
- KL45-4012-SE4 12" spout, compression valves

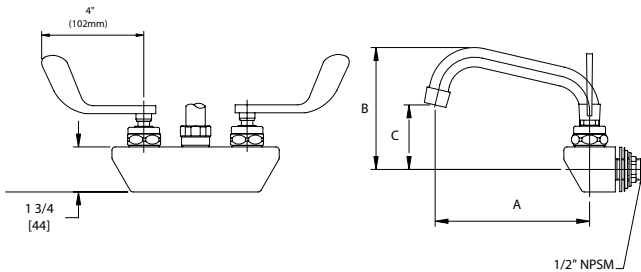

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality for hand sinks.

### Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

### SPECIFICATIONS:

Wall Mount Faucet to be Encore KL45 Series in the following configuration:

- \_\_\_\_\_ KL45-4106-SE4 6" spout, ceramic valves
- \_\_\_\_\_ KL45-4006-SE4 6" spout, compression valves
- \_\_\_\_\_ KL45-4108-SE4 8" spout, ceramic valves
- \_\_\_\_\_ KL45-4008-SE4 8" spout, compression valves
- \_\_\_\_\_ KL45-4110-SE4 10" spout, ceramic valves
- \_\_\_\_\_ KL45-4010-SE4 10" spout, compression valves
- \_\_\_\_\_ KL45-4112-SE4 12" spout, ceramic valves
- \_\_\_\_\_ KL45-4012-SE4 12" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with 4" wrist blade handles. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL45-4106-SE4	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-4006-SE4	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-4108-SE4	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-4008-SE4	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-4110-SE4	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-4010-SE4	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-4112-SE4	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)
KL45-4012-SE4	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)

For a complete list of available options for KL45-4000 Series, see product configurator on reverse.

### COMPLIES WITH:

ASME A112.18.1-2005  
 CSA B125.1-05  
 NSF/ANSI 61/9, ANNEX G  
 SECTION 116875 OF THE  
 CALIFORNIA HEALTH & SAFETY CODE  
 (COMMONLY KNOWN AS AB1953)  
 VERMONT ACT 193  
 UNIFORM PLUMBING CODE



## Faucet Configuration for KL45-4000 Series

