

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] 8" (203mm) Wall Mount Faucet with Tubular Swing Spout and Lever Handles

KL45-8xxx-SE1 Series

- KL45-8106-SE1 6" spout, ceramic valves
- KL45-8006-SE1 6" spout, compression valves
- KL45-8108-SE1 8" spout, ceramic valves
- KL45-8008-SE1 8" spout, compression valves
- KL45-8110-SE1 10" spout, ceramic valves
- KL45-8010-SE1 10" spout, compression valves
- KL45-8112-SE1 12" spout, ceramic valves
- KL45-8012-SE1 12" spout, compression valves
- KL45-8114-SE1 14" spout, ceramic valves
- KL45-8014-SE1 14" spout, compression valves
- KL45-8116-SE1 16" spout, ceramic valves
- KL45-8016-SE1 16" spout, compression valves

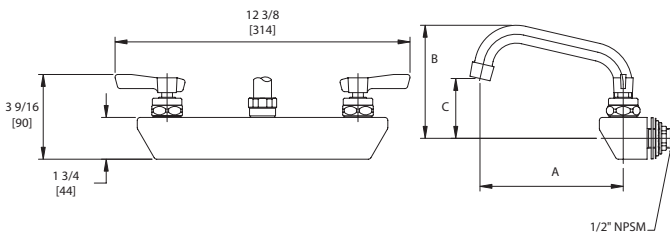

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi
 Note: 1-1/8" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality for hand sinks.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL45 Series in the following configuration:

- _____ KL45-8106-SE1 6" spout, ceramic valves
- _____ KL45-8006-SE1 6" spout, compression valves
- _____ KL45-8108-SE1 8" spout, ceramic valves
- _____ KL45-8008-SE1 8" spout, compression valves
- _____ KL45-8110-SE1 10" spout, ceramic valves
- _____ KL45-8010-SE1 10" spout, compression valves
- _____ KL45-8112-SE1 12" spout, ceramic valves
- _____ KL45-8012-SE1 12" spout, compression valves
- _____ KL45-8114-SE1 14" spout, ceramic valves
- _____ KL45-8014-SE1 14" spout, compression valves
- _____ KL45-8116-SE1 16" spout, ceramic valves
- _____ KL45-8016-SE1 16" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with lever handles. Supply inlets to be 8" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL45-8106-SE1	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-8006-SE1	6" (152mm)	4-3/4" (121mm)	2-1/2" (64mm)
KL45-8108-SE1	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-8008-SE1	8" (203mm)	5-1/4" (133mm)	3" (76mm)
KL45-8110-SE1	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-8010-SE1	10" (254mm)	5-11/16" (144mm)	3-7/16" (87mm)
KL45-8112-SE1	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)
KL45-8012-SE1	12" (305mm)	6-1/8" (156mm)	3-7/8" (99mm)
KL45-8114-SE1	14" (357mm)		
KL45-8014-SE1	14" (357mm)		
KL45-8116-SE1	16" (406mm)		
KL45-8016-SE1	16" (406mm)		

For a complete list of available options for KL45-8000 Series, see product configurator on reverse.

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE



Faucet Configuration for KL45-8000 Series

