

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Deck Mount Utility Spray Assembly

**KL50-2x00-xx**

- KL50-2000      Compression valves, no vacuum breaker
- KL50-2100      Ceramic Valves, no vacuum breaker
- KL50-2000-VB      Compression valves with vacuum breaker
- KL50-2100-VB      Ceramic valves with vacuum breaker

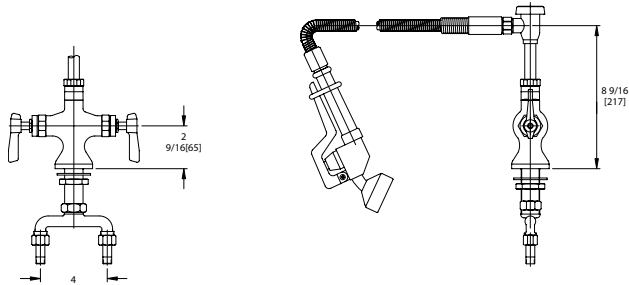

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for wall are recommended to accommodate 1/2" supply nipples.

1/2" NPT female inlets

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Provided with 3.3gpm, 1.6gpm and 1.2gpm spray faces
- ADA-compliant lever handles
- 72" flexible S/S hose with Kool Grip™ handle

**SPECIFICATIONS:**

Deck Mount Utility Spray to be Encore KL50-2000 Series in the following configuration:

- \_\_\_\_\_ KL50-2000      Compression Valves Without Vacuum Breaker
- \_\_\_\_\_ KL50-2100      Ceramic Valves Without Vacuum Breaker
- \_\_\_\_\_ KL50-2000-VB      Compression Valves With Vacuum Breaker
- \_\_\_\_\_ KL50-2100-VB      Ceramic Valves With Vacuum Breaker

Faucet body to be constructed of polished chrome plated brass with lever handles. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Hose to be 72" flexible stainless steel with Kool Grip™ handle and vacuum breaker. Hose to have Santoprene<sup>®</sup> reinforced inner hose. Hold open ring and hose wall hook to be included.

**COMPLIES WITH:**  
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" –  
 2011 – US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

