

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Deck Mount Double Pantry Faucet with Double Jointed Swing Spout and Lever Handles

## KL51-9x18-SE1 Series

KL51-9118-SE1 18" Spout, Ceramic Valves  
 KL51-9018-SE1 18" Spout, Compression Valves

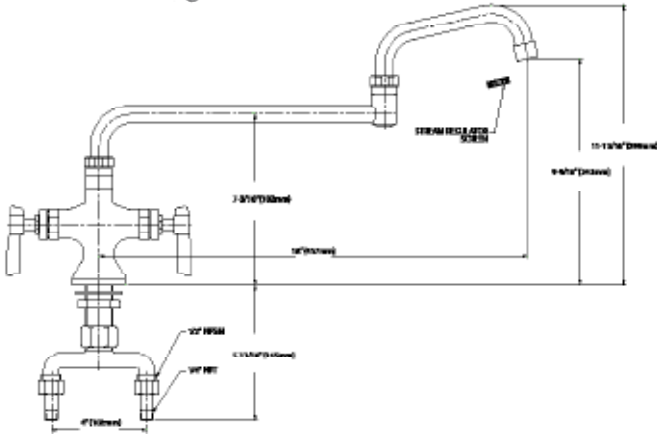

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi  
 1-1/4" (32mm) hole for double pantry is recommended

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

### Commercial Quality Features

- Double jointed swing spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

### SPECIFICATIONS:

Deck Mount Double Pantry Faucet to be Encore KL51 Series in the following configuration:

- \_\_\_\_\_ KL51-9118-SE1 18" DJ Spout, Ceramic Valves
- \_\_\_\_\_ KL51-9018-SE1 18" DJ Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass with lever handles. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel 18" double jointed swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" –  
 2011 – US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

