

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Deck Mount 4" (102mm) Centerset
 Faucet with Cast Spout and Lever Handles

KL83-4x04-CE1 Series

- KL83-4004-CE1 4" Spout, Compression Valves
- KL83-4104-CE1 4" Spout, Ceramic Valves

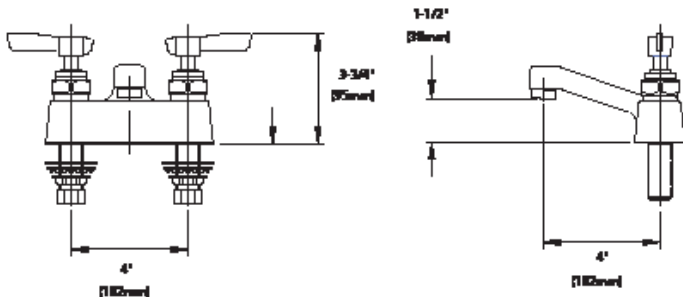

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples
 1/2" NPSM Male Inlets with Compression Fittings
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Polished chrome plated cast brass body
- 4" (102mm) cast spout
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow

SPECIFICATIONS:

Deck Mount Centerset Faucet to be Encore KL83 Series in the following configuration:

- _____ KL83-4004-CE1 4" Spout, Compression Valves
- _____ KL83-4104-CE1 4" Spout, Ceramic Valves

Faucet body to be constructed of polished chrome plated brass with lever handles t. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Color coded temperature indexes shall meet international standards. Spout to be 4" (102mm) cast. 2.2gpm aerator @60psi standard with full flow stream bubbler screenspout tip.

For a complete list of available options for KL83-4004-C Series, see product configurator on reverse.

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G



Faucet Configuration for KL83-4004-C Series

