

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Commercial Low Lead Wall Mount Pre-Rinse Assembly

KC53-1x00-xx Series

- KC53-1000 without wall bracket, compression valves
- KC53-1000-BR with wall bracket (shown), compression valves
- KC53-1100 without wall bracket, ceramic valves
- KC53-1100-BR with wall bracket, ceramic valves



1-1/2" (29mm) holes for backsplash are recommended to accommodate 1/2" supply nipples.
1/2" NPT Female Inlets
Operating Temperature: 40 - 180°F (5 - 83°C)
Operating Pressure: 15 - 125psi

Approximate shipping weight - 13 lb
Warranty - 2 years parts on faucet and spray valve

Commercial pre-rinse assembly designed to withstand the demands of commercial operations.

Low-Flow Spray Valve

- 1.6gpm Flat Spray
- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

Commercial Hose Feature

- Santoprene[®] inner hose provides maximum durability
- Stainless steel outer hose shroud protect inner hose

Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

SPECIFICATIONS:


Low Lead Commercial Wall Mount Pre-Rinse Assembly to be Encore KC53-1000 Series in the following configuration:

- ___ KL53-1000 without wall bracket
- ___ KL53-1000-BR with wall bracket
- ___ KL53-1100 without wall bracket
- ___ KL53-1100-BR with wall bracket

Pre-rinse body to be constructed of polished chrome plated brass. Pre-rinse hose to be constructed of Santoprene[®]. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided with model KC53-1000-BR and KC53-1100-BR to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray head to be furnished with 1.6gpm* Water Saver Spray. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand.

*All flow rates are @ 60psi

Dimensions shown in inches (mm) are for reference only and are subject to change.

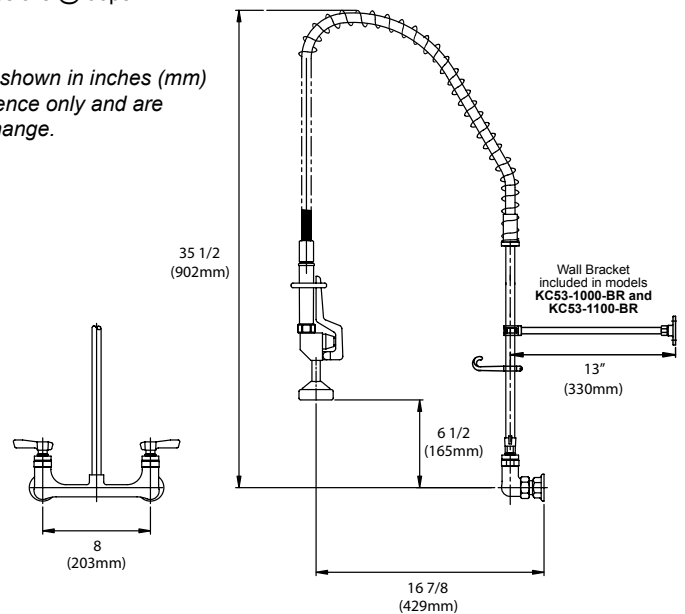

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

