

PROJECT NAME: _____

LOCATION: _____



SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore® Low Lead Add-On Faucet with Swing Spout, and 4" Wrist Blade Handle

KL55-70xx-SE4 Series

- KL55-7006-SE4 6" Spout
- KL55-7008-SE4 8" Spout
- KL55-7010-SE4 10" Spout
- KL55-7012-SE4 12" Spout
- KL55-7014-SE4 14" Spout
- KL55-7016-SE4 16" Spout

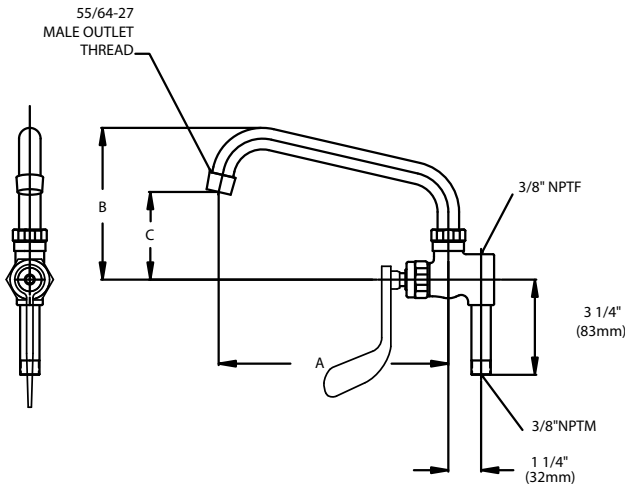

Dimensions shown in inches (mm) are for reference only and are subject to change.

3/8" NPT male riser pipe inlet
 3/8" NPT female outlet
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi
 Note: 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 3 lbs
 Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial quality

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handle
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design

SPECIFICATIONS:

Low Lead Add-On Faucet to be Encore KL55 Series in the following configuration:

- _____ KL55-7006-SE4 6" Spout
- _____ KL55-7008-SE4 8" Spout
- _____ KL55-7010-SE4 10" Spout
- _____ KL55-7012-SE4 12" Spout
- _____ KL55-7014-SE4 14" Spout
- _____ KL55-7016-SE4 16" Spout

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Handle to be 4" wrist blade. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be tubular swing style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

| Model No. | A | B | C |
|---------------|-------------|----------------|----------------|
| KL55-7006-SE4 | 6" (152mm) | 4-3/4" (121mm) | 2-1/2" (64mm) |
| KL55-7008-SE4 | 8" (203mm) | 5-1/4" (133mm) | 3" (76mm) |
| KL55-7010-SE4 | 10" (254mm) | 5-3/4" (146mm) | 3-1/2" (89mm) |
| KL55-7012-SE4 | 12" (305mm) | 6-1/4" (159mm) | 4" (102mm) |
| KL55-7014-SE4 | 14" (356mm) | 6-3/4" (171mm) | 4-1/2" (114mm) |
| KL55-7016-SE4 | 16" (406mm) | 7-1/4" (184mm) | 5" (127mm) |

COMPLIES WITH:
 ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE

