



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ QTY: _____

TOP-LINE PART NO. _____

TOP-LINE® Low Lead 8" OC Wall Mount
 Pre-Rinse Assembly with PowerPulse™ Spray,
 Quarter Turn Ceramic Valves

TLP13-11Lx-xx

Model	Flow Rate	Valves	Spring	Wall Bracket
TLP13-11L1	0.45gpm	Ceramic	Chrome Plated	None
TLP13-11L2	0.67gpm			
TLP13-11L3	0.74gpm			
TLP13-11L4	1.05gpm			
TLP13-11L5	1.22gpm			
TLP13-11L6	1.52gpm			

TLP13-11L1-S	0.45gpm	Ceramic	Stainless Steel	None
TLP13-11L2-S	0.67gpm			
TLP13-11L3-S	0.74gpm			
TLP13-11L4-S	1.05gpm			
TLP13-11L5-S	1.22gpm			
TLP13-11L6-S	1.52gpm			

TLP13-11L1-BR	0.45gpm	Ceramic	Chrome Plated	Yes
TLP13-11L2-BR	0.67gpm			
TLP13-11L3-BR	0.74gpm			
TLP13-11L4-BR	1.05gpm			
TLP13-11L5-BR	1.22gpm			
TLP13-11L6-BR	1.52gpm			

TLP13-11L1-BS	0.45gpm	Ceramic	Stainless Steel	Yes
TLP13-11L2-BS	0.67gpm			
TLP13-11L3-BS	0.74gpm			
TLP13-11L4-BS	1.05gpm			
TLP13-11L5-BS	1.22gpm			
TLP13-11L6-BS	1.52gpm			



Solid low lead heavy-duty cast body is specification and commercial quality.

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- ADA-compliant lever handles

PowerPulse Spray Valve

- Available in .45, .67, .74, 1.05, 1.22, 1.52 GPM rated flow rates
- Faster clean time - as low as 12 seconds
- Reduces water consumption by up to 58%
- Patent pending

Kool Grip™ Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

SPECIFICATIONS:

8" OC Wall Mount Pre-Rinse Assembly to be TOP-LINE TLP13-11Lx-xx.

Pre-rinse faucet body to be constructed of polished chrome plated brass. Hose to be constructed of 3-ply nylon reinforced Santoprene® permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand.

Approximate shipping weight - 13 lbs
 Warranty - 1 year parts




TLP13-11Lx-xx

Low Lead 8" OCWall Mount Pre-Rinse Assembly with PowerPulse Spray, Quarter Turn Ceramic Valves



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.toplineplumbing.com

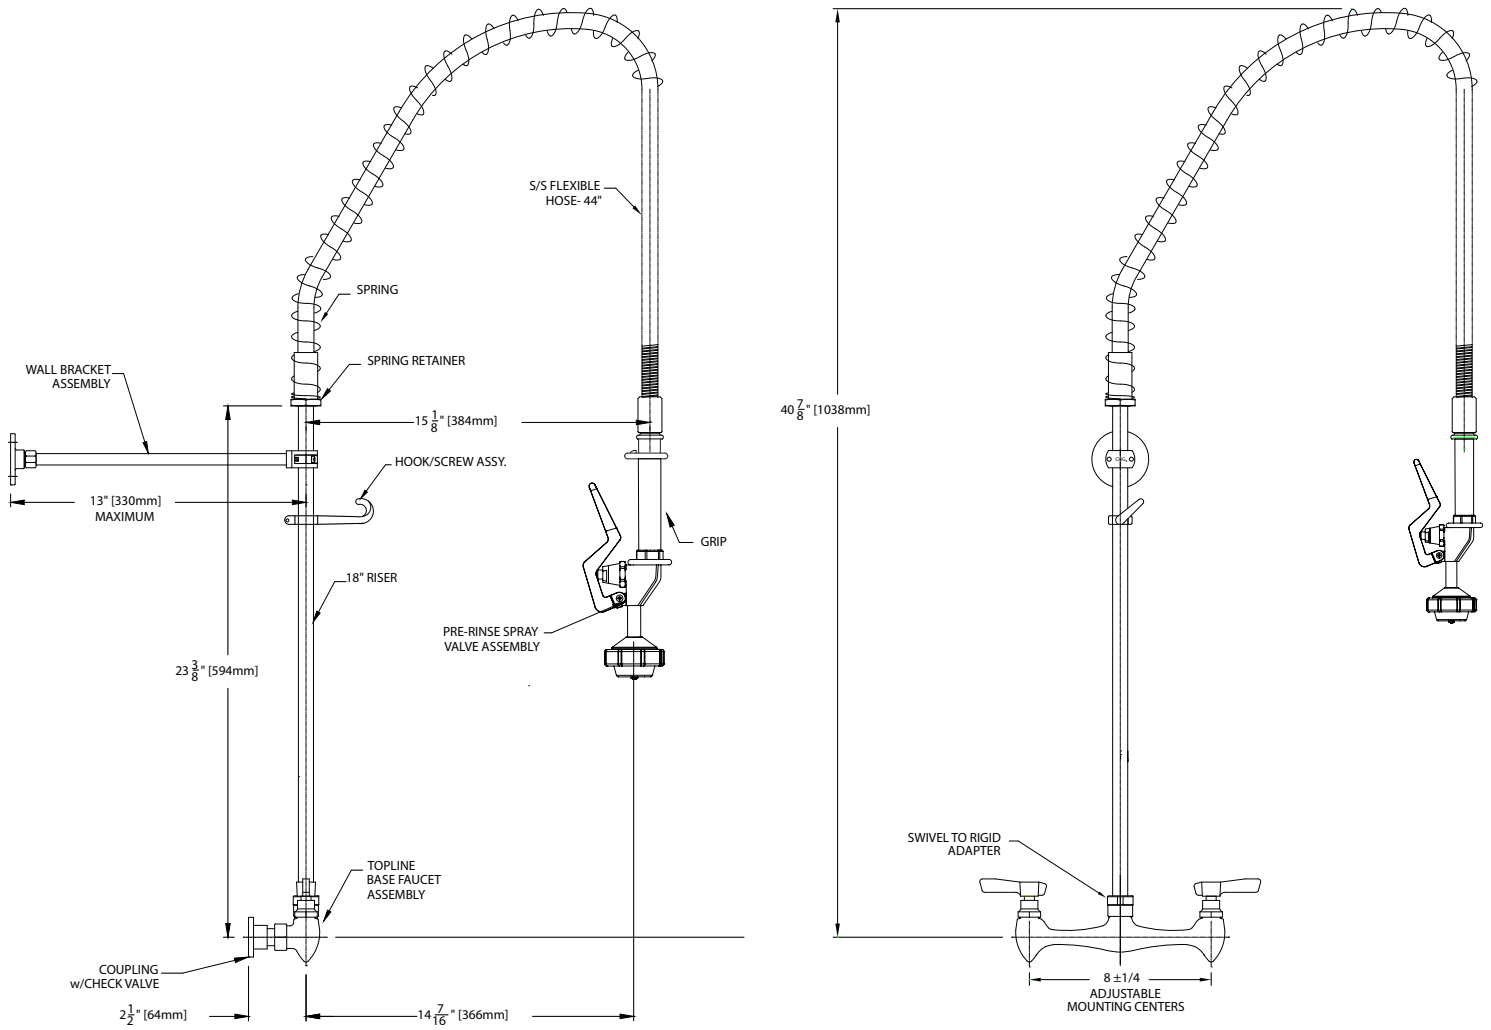

1-1/2" (29mm) holes for wall are recommended to accommodate 1/2" supply nipples.
 1/2" NPSM Male Inlets
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Dimensions shown in inches (mm) are for reference only and are subject to change.