



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
 www.toplineplumbing.com

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**TOP-LINE PART NO.** \_\_\_\_\_

**TOP-LINE® Low-Lead Single Deck Mount  
 Pantry Faucet with Swivel Gooseneck Spout  
 and Quarter Turn Ceramic Valves**

**TLL20-910x Series**

- TLL20-9100-SE1 3" Swivel Gooseneck Spout
- TLL20-9101-SE1 8" Swivel Gooseneck Spout
- TLL20-9102-SE1 6" Swivel Gooseneck Spout

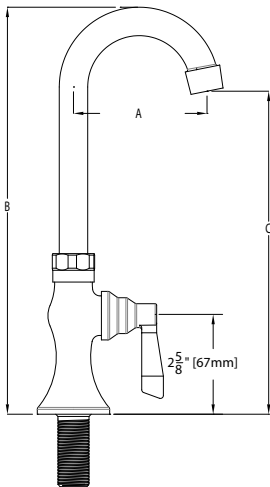

*Dimensions shown in inches (mm) are for reference only and are subject to change.*

- 1-1/8" Holes for Deck
- 1/2" NPSM Male Inlet
- Operating Temperature: 40-180°F (5-83°C)
- Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs  
 Warranty - 1 year

Solid heavy duty cast brass body is specific and commercial quality

**Commercial Quality Features**

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel swivel gooseneck spout design
- ADA-compliant lever handle
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

**SPECIFICATIONS:**

Low Lead Single Deck Mount Pantry Faucet to be TOP-LINE TLL20-9100-SE1 Series in the following configuration:

- \_\_\_\_\_ TLL20-9100-SE1 3" Swivel Gooseneck Spout
- \_\_\_\_\_ TLL20-9101-SE1 8" Swivel Gooseneck Spout
- \_\_\_\_\_ TLL20-9102-SE1 6" Swivel Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass. Valve to be quarter turn ceramic type. Handle to be lever style. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard aerator. Single hole deck mount faucet accommodates installations up to 1" (25mm) thick. Faucet body incorporates a sealant recess or rubber gasket (included) to create watertight seal around faucet base. Mounting hardware included (1/2" NPS male inlet with compression seal and nut for standard lavatory risers).

Model No.	A	B	C
TLL20-9100-SE1	3-1/2" (89mm)	10-3/4" (273mm)	8-1/2" (216mm)
TLL20-9101-SE1	8-1/2" (216mm)	15-3/4" (400mm)	11-1/2" (292mm)
TLL20-9102-SE1	6" (152mm)	11-1/2" (292mm)	7-5/8" (194mm)

