

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_


**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> 4" (102mm) Deck Mount Faucet with Rigid Gooseneck Spout and Metering Handles

**KL83-420x-RE Series**

- KL83-4200-RE 3" Spout, Metering Valves
- KL83-4202-RE 6" Spout, Metering Valves
- KL83-4201-RE 8" Spout, Metering Valves

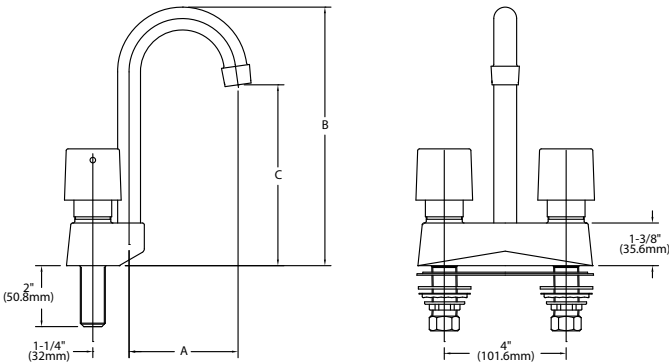

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples.  
 1/2" NPSM Male Inlets  
 Operating Temperature: 40-180°F (5-83°C)  
 Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

**Commercial Quality Features**

- Rigid gooseneck spout design
- ADA-compliant metering handles
- Built-in check valves to prevent cross-flow and back-flow
- Stainless steel spout

**SPECIFICATIONS:**

Wall Mount Faucet to be Encore KL83 Series in the following configuration:

- \_\_\_ KL83-4200-RE 3" Spout, Metering Valves
- \_\_\_ KL83-4202-RE 6" Spout, Metering Valves
- \_\_\_ KL83-4201-RE 8" Spout, Metering Valves

Faucet body to be constructed of polished chrome plated brass with metering handles. Supply inlets to be 4" on center. Spout to be stainless steel rigid gooseneck style. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL83-4200-RE	3-1/2" (89mm)	8-1/2" (216mm)	6" (152mm)
KL83-4202-RE	6" (152mm)	9-1/2" (241mm)	5-1/2" (140mm)
KL83-4201-RE	8-1/2" (216mm)	12-1/2" (317mm)	6-1/4" (159mm)

For a complete list of available options for KL83-4000-RE Series, see product configurator on reverse.

COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" –  
 2011 – US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G



## Faucet Configuration for KL83-420x-RE Series

