



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
 www.toplineplumbing.com

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**TOP-LINE PART NO.** \_\_\_\_\_

**TOP-LINE® Low Lead Deck Mount  
 Pre-Rinse Assembly with Quarter Turn  
 Ceramic Valves and Add-On Faucet**

**TLL50-1100-AFx**

- TLL50-1100-AF1 6" Add-On
- TLL50-1100-AF2 8" Add-On
- TLL50-1100-AF3 10" Add-On
- TLL50-1100-AF4 12" Add-On
- TLL50-1100-AF5 14" Add-On
- TLL50-1100-AF6 16" Add-On
- TLL50-1100-AF7 18" Add-On



Approximate shipping weight - 13 lbs  
 Warranty - 1 year parts

Solid low lead heavy-duty cast body is specification and commercial quality.

**Commercial Quality Features**

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- 1.6 gpm water saving spray head
- ADA-compliant lever handles

**Spray Valve**

- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

**Kool Grip™ Hose Grip**

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

**SPECIFICATIONS:**

Deck Mount Pre-Rinse Assembly to be TOP-LINE TLL50-1100-AFx.

Pre-rinse body to be constructed of polished chrome plated brass. Handles to be lever style. Single hole deck mount pre-rinse accommodates installations up to 1" (25mm) thick. Pre-rinse body incorporates a sealant recess or rubber gasket (included) to create watertight seal around faucet base. Hose to be stainless steel flex with Santoprene reinforced hose. Spray head to be standard 1.6gpm @ 60psi full spray pattern. Spray assembly to be equipped with Kool Grip™ handle to reduce heat transfer to hand. Wall bracket, hold open ring and hose hook to be included.




# TLL50-1100-AFx

## Low Lead Deck Mount Pre-Rinse Assembly with Quarter Turn Ceramic Valves and Add-On Faucet



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.toplineplumbing.com](http://www.toplineplumbing.com)

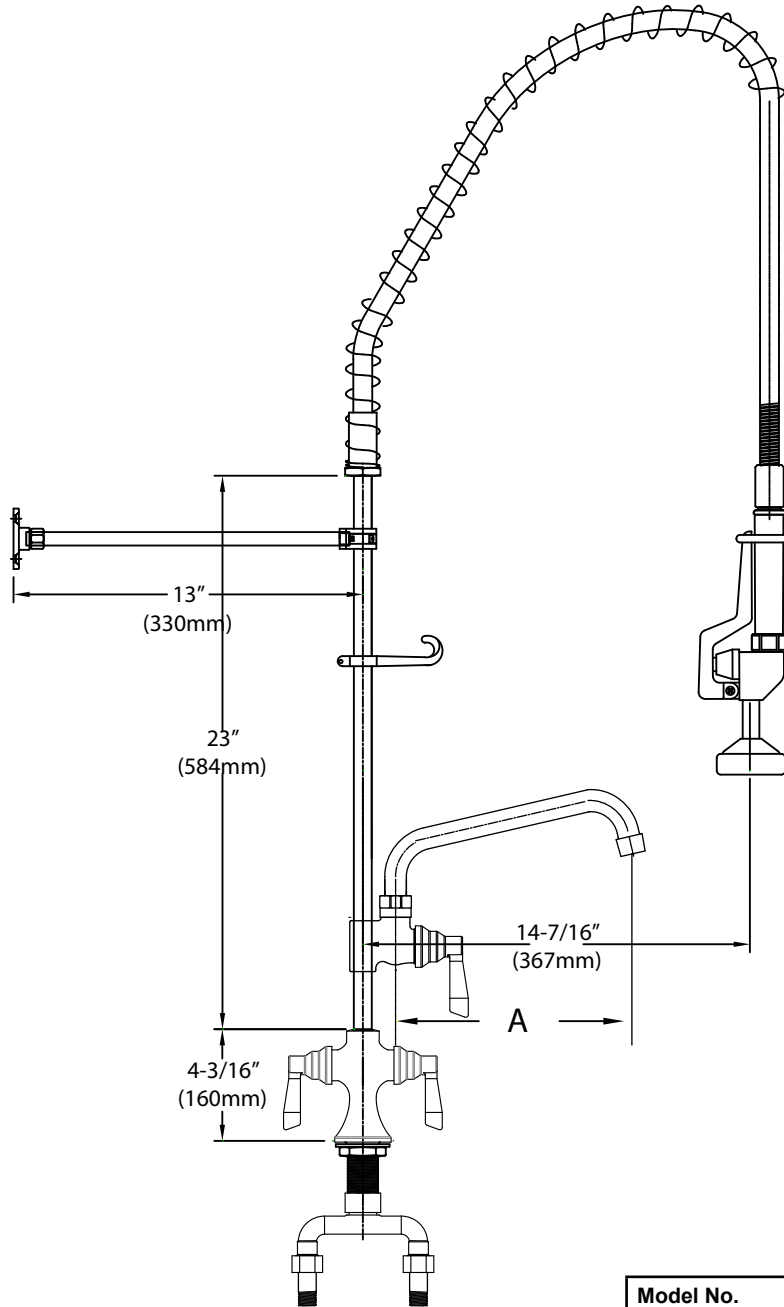

1/2" NPSM Male Inlets with  
1/4" NPT Compression Fittings  
Operating Temperature: 40 - 180°F (5 - 83°C)  
Operating Pressure: 15 - 125psi

Model No.	A
TLL50-1100-AF1	6" (152mm)
TLL50-1100-AF2	8" (203mm)
TLL50-1100-AF3	10" (254mm)
TLL50-1100-AF4	12" (305mm)
TLL50-1100-AF5	14" (356mm)
TLL50-1100-AF6	16" (406mm)

Dimensions shown in inches (mm) are for reference only and are subject to change.