

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Deck Mount Widespread Faucet
 with Adjustable Gooseneck Spout
 and Lever Handles

KL84-8x0x-SE1 Series

- KL84-8100-SE1 3" Spout, Ceramic Valves
- KL84-8000-SE1 3" Spout, Compression Valves
- KL84-8101-SE1 8" Spout, Ceramic Valves
- KL84-8001-SE1 8" Spout, Compression Valves
- KL84-8102-SE1 6" Spout, Ceramic Valves
- KL84-8002-SE1 6" Spout, Compression Valves

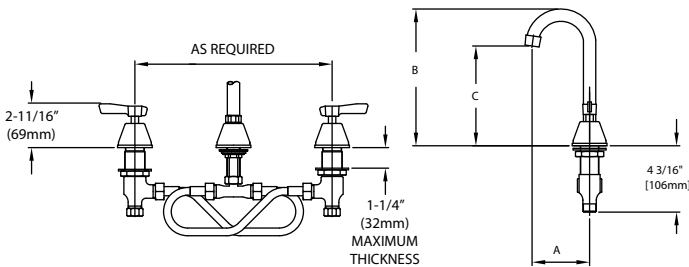

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPSM Male Inlets with Compression Fittings
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi
 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipple.

Approximate shipping weight - 8 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Adjustable gooseneck spout design
- ADA-compliant lever handles
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel spout

SPECIFICATIONS:

Deck Mount Faucet to be Encore KL84 Series in the following configuration:

- ___ KL84-8100-SE1 3" Spout, Ceramic Valves
- ___ KL84-8000-SE1 3" Spout, Compression Valves
- ___ KL84-8101-SE1 8" Spout, Ceramic Valves
- ___ KL84-8001-SE1 8" Spout, Compression Valves
- ___ KL84-8102-SE1 6" Spout, Ceramic Valves
- ___ KL84-8002-SE1 6" Spout, Compression Valves

Faucet body to be constructed of polished chrome plated brass. Faucet to have 5"-12" adjustable inlet center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel adjustable gooseneck style. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL84-8100-SE1	3-1/2" (89mm)	9-5/16" (236mm)	6-5/16" (160mm)
KL84-8000-SE1			
KL84-8101-SE1	8-1/2" (216mm)	15-1/8" (384mm)	9-3/4" (248mm)
KL84-8001-SE1			
KL84-8102-SE1	6" (152mm)	9-13/16" (249mm)	5-7/8" (149mm)
KL84-8002-SE1			

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

